


Installation Instructions for DaL-Drains


For Shower receptions or one piece fiberglass stalls. Part No. DD2S

1. Attach drain body to the base of the unit. Do not tighten Lock-Nut excessively.
2. Use silicone on flange. (Do not use any oil base products on flange.)
3. Use gasket lube (non mineral oil or linseed) or hand cleaner to lubricate gasket.
4. With grooves of gasket face up, drive gasket home with 2" coupling. Cut Pipe stub with internal cutter at top of gasket, if you measured pipe stub is off. Leave no fouling area.

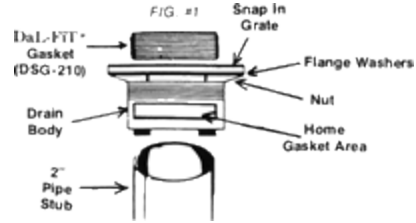

For Ceramic tile or marble showers, etc. Part No. DD2T

1. Remove Adj. strainer and bolt down flange from drain body. Lubricate gasket without removing and push over 2" pipe stub.
2. Use drain body as cutting template for plastic or metal pan material. (center hole and 4 bolt holes).
3. Use DS bonding fluid or silicone to seal between drain body and pan liner. (use DS bonding fluid on PVC or ABS drains).
4. Place bolt down flange over pan material and both down. Now screw in adj. strainer to desired height. Use our strainer cover to keep debris out of drain during construction.
5. Make sure that pipe stub is even with top of gasket to prevent a fouling area. Cut if necessary with internal cutter.

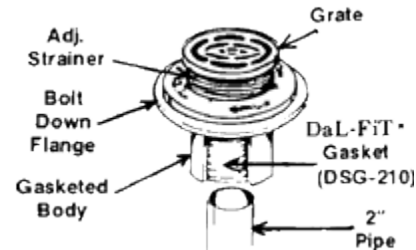

For Ceramic tile or marble showers, etc. Part No. DD23-T PVC or ABS

1. Remove adj. strainer and bolt down flange from drain body. Solvent-weld over 2" PVC or ABS pipe or inside 3" pipe.
2. Use drain body as cutting template for plastic or metal pan material. (center hole and 4 bolt holes).
3. Use DS bonding fluid or silicone to seal between drain body and pan liner. Use silicone on metal pans. Use DS bonding fluid on PVC or ABS drains.
4. Place bolt down flange over pan material and both down. Now screw in adj. strainer to desired height. Use our strainer cover to keep debris out of drain during construction.



LIMITED WARRANTY

As the use of this product is beyond the control of the seller, liability of the sellers shall be limited to replacement of product. Dallas Specialty warrants that their products are manufactured free of defects in material and workmanship. The limit of Dallas Specialty liability for failure of any of the products to meet foregoing warrants or for any breach of any other warranty, express, implied or statutory shall be to supply an equivalent amount of products returned to it and found by Dallas Specialty to be defective. DUE TO THE WIDELY VARYING CONDITIONS UNDER WHICH OUR PRODUCTS ARE USED OR INSTALLED, DALLAS SPECIALTY OFFERS NO WARRANTY AS TO THE LENGTH OR SERVICE SUITABILITY FOR ANY PARTICULAR PURPOSE OF THE PRODUCTS. IN NO EVENT SHALL DALLAS SPECIALTY BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OR INJURY. Any action for breach of warranty must be brought within 30 days of delivery. DALLAS SPECIALTY retains the right to make changes or improvements from time to time in the products.